

GEN 2 - 2224 HYDRAULIC REQUIREMENTS


Model	Rows	Hydraulic Capacity	Hydraulic Pressure	Minimum Hyd Hose Size		
				Pressure	Return	Case Drain
GEN2 2224*	24	25 gpm (95 lpm)	2850 psi (197 bar)	1 inch*	1 inch*	½ inch

* 24 Row GEN 2 w/ Cray fan (MY2022) requires a large body high flow motor return port and we recommend a 3/4" SCV valve body with 3/4" high flow coupler and/or teeing together two SCV pressure lines for optimal performance.

GEN 2 - 2224 RATE CAPACITY & SPECIFICATION

Feature	Benefit
Configurable Rows	Rows can be added and subtracted to fit your farming operation's needs.
Tank Size	Available in 13 or 16 ton tank capacity.
Up to 4 section configurations	Sections can be added to the GEN 2 system at any time giving you added flexibility.
	Sections are controlled with hydraulic motors and PWM valves for in field reliability.
Screen	Extra large screen area is constructed completely out of stainless steel
Rear Deck & Ladder	The rear deck can be configured for the ladder to be mounted for a left or a right-hand entrance.
Rate Controller	Montag ISO Rate Controller is standard.
Light kit (optional)	LED safety transport lights.
Blockage Sensors	Wireless J. Assy blockage sensor kits available in different tube sizes.
3 year Warranty	High quality, for customer satisfaction and confidence.
Hydraulic Lids	Wireless remote control hydraulic lids.

GEN 2 2224

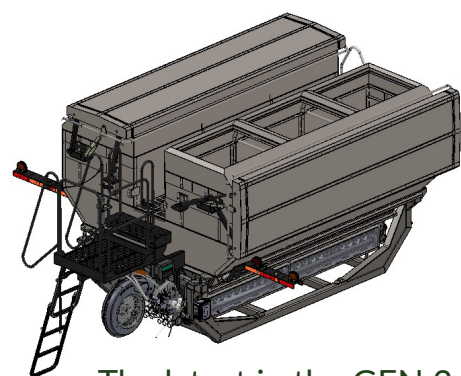

The latest in the GEN 2 product family, the 2224 is designed for operators that need a highly functional and accurate metering system, that also has a carrying capacity of up to 550cu ft or 16 ton of fertilizer.



MONTAG MANUFACTURING, INC.

3816 461st Ave, Emmetsburg, IA 50536
1253 280th Rd, Seward, NE 68434

Phone: (712) 517-2775

Email: info@montagmfg.com

Web: www.montagmfg.com

